


	INTAKE	EXHAUST
ADVERTISED DURATION	280°	280°
ACTUAL CAM LIFT (in/mm)	.459" / 11.66mm	.445" / 11.30mm
ROCKER ARM RATIO	1:1	1.1
CENTERLINE	Variable	Variable
LOBE SEPERATION	Variable	
DURATION AT 0.050" CAM	240°	234°
DURATION AT 0.050" VALVE	240°	234°
VALVE CLEARANCE	.008" / .20mm	.010" / .25mm
RECOMMENDED SPRING KIT	BC0130	

CAMSHAFT TIMING AT 0.050" VALVE LIFT	OPEN	CLOSES
	INTAKE	n/a BTDC
EXHAUST	n/a BBDC	n/a BTDC

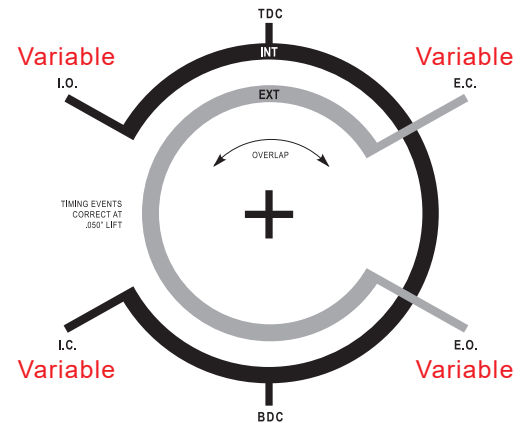

NOTES

BC does not recommend using synthetic oil during break-in or operation. Follow OEM manufacturer's torque sequence and specifications. Use liberal amount of aftermarket engine assembly lube during installation. Check follower or bucket surfaces for abnormal wear and/or scuffing. On initial start-up and break-in run engine at 1500-2500 rpm for 20 minutes. **Camshafts damaged by improper installation, excessive spring pressure or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.**

